



TP660M-B

Peak Power:230-260Wp

MODULE CHARACTERISTICS

- Positive Only Power Tolerance: 0-+3%
- High Mechanical Load Strength:
 - Product to Withstand High Wind Loads (5400Pa) and High Snow Loads (5400Pa) in Accordance with IEC 61215
- Fully Automated Production Line:
 - Better Soldering
 - Better Cell Spacing Tolerance: $\pm 0.3\text{mm}$
 - Better and More Consistent Product Quality
- Black Frame and Black Back Sheet



ELECTRICAL PARAMETERS* TP660M-B

MODEL	230	235	240	245	250	255	260
Maximum Rated Power at STC	230W	235W	240W	245W	250W	255W	260W
Voltage at Maximum Power (Vmp)	29.5V	29.6V	29.9V	30.1V	30.1V	30.4V	30.8V
Current at Maximum Power (Imp)	7.80A	7.90A	8.06A	8.21A	8.35A	8.38A	8.40A
Open Circuit Voltage (Voc)	36.8V	37.0V	37.2V	37.4V	37.7V	37.9V	38.2V
Short Circuit Current (Isc)	8.45A	8.54A	8.62A	8.69A	8.78A	8.81A	8.83A
Module Efficiency $\eta_m(\%)$	14.2	14.5	14.8	15.1	15.4	15.7	16.0
Power Tolerance	0-+3%						
Temperature Coefficient	Pmax				-0.45%/°C		
	Voc				-0.35%/°C		
	Isc				+0.05%/°C		
	NOCT				45 \pm 2°C		

* STC: 1000 w/m², 25 °C, AM 1.5



Zhongli Talesun Solar Co.,Ltd.


1# Talesun Road, Shajiang, Changshu, Suzhou, Jiangsu Province, P.R. China 215542

Email: sales@talesun.com
Web: www.talesun.com

T: +86 400 885 1098
F: +86 512 8235 5588




TECHNICAL DRAWINGS

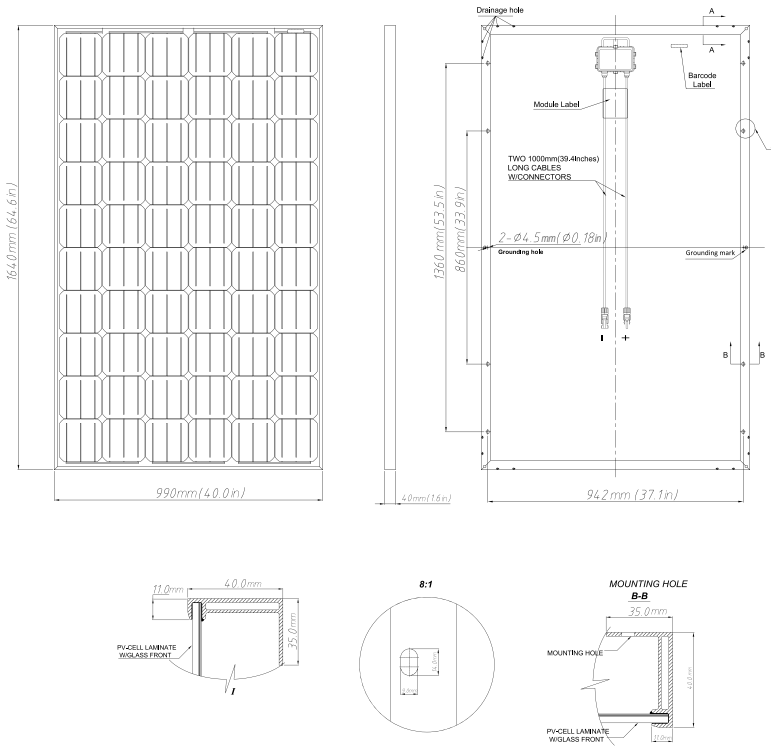


I-V CURVE

Output under different radiation and temperature conditions.

Electrical Performance
(Cell Temperature: 25°C)

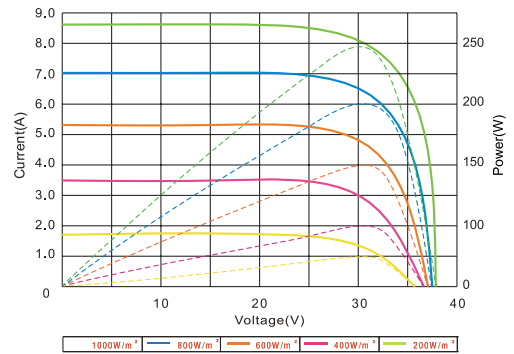

TP660M-B Pm(W)250

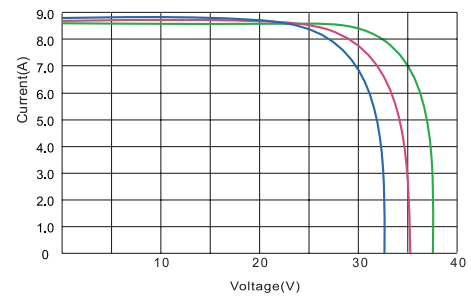

DIMENSIONS


Cell Type	Mono Crystalline
Cell Dimensions	156 × 156mm (6in)
Cell Arrangement	60 (6 × 10)
Weight	20kg (44.1lbs)
Module Dimensions	1640 × 990 × 40mm (64.6 × 39.0 × 1.6in)
Cable Length	1000mm (39.4in)
Cable Cross Section Size	4mm ² (0.006sq.in)
No. of Bypass Diodes	6
Packing Configuration	25 Per Pallet
Frame	Anodized Aluminium Alloy
Junction Box	IP 65 Rate

OPERATING CONDITIONS

Maximum System Voltage	1000V/DC(IEC)
Operating Temp.	-40°C -- +85°C
Maximum Series Fuse	15A
Static Loading	5400pa
Conductivity at Ground	0.1 Ω
Safety Class	II
Resistance	≥ 100M Ω
Connector	MC4

WARRANTY

Product Quality Warranty: 10 years

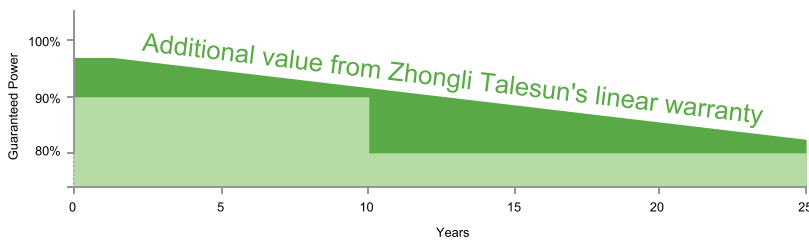

Performance as Set Forth Below:

- During the first year, TALESUN guarantees the actual power output of the module will be no less than 97% of the labeled power output.
- From year 2 to year 24, the actual annual power decline will be no more than 0.7%; by the end of year 25, the actual power output will be no less than 80% of the labeled power output.

CERTIFICATIONS & STANDARDS

IEC61215, IEC61730, UL1703